

TEST REPORT

Report No.: BCTC2209066342S

Applicant: Shenzhen LinkedSparx Technology Co., Ltd

Product Name: SYRO-Bricks

Product Type: LS-B3

Tested Date: 2022-09-28 to 2022-10-14


Issued Date: 2022-10-28


Shenzhen BCTC Testing Co., Ltd.



TEST REPORT IEC 60598-2-1 Luminaires Part 2: Particular requirements Section 1: Fixed general purpose luminaires	
Report Number.....	BCTC2209066342S
Date of issue.....	2022-10-28
Total number of pages	51 pages
Name of Testing Laboratory preparing the Report	Shenzhen BCTC Testing Co., Ltd. 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Applicant's name	Shenzhen LinkedSparx Technology Co., Ltd
Address.....	606, 82, 4th Industrial Park, Tantou, Songgang, Bao'an District, Shenzhen
Test specification:	
Standard.....	IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020
Test procedure	Test report
Non-standard test method	N/A
TRF template used.....	IECEE OD-2020-F1:2020, Ed.1.3
Test Report Form No.	IEC60598_2_1H
Test Report Form(s) Originator	Intertek Semko AB
Master TRF.....	Dated 2021-05-21
Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	SYRO-Bricks
Trade Mark(s)	LinkedSparx
Manufacturer	Same as applicant
Model/Type reference :	LS-B3 LS-B3A, LS-B3B, LS-B3C, LS-B3D, LS-B3E, LS-B3F, LS-B3G, LS-B3H, LS-B3I, LS-B3J, LS-B3K, LS-B3L
Ratings :	5V $\overline{=}$, 2A, Max.10W (More detail see general product information)

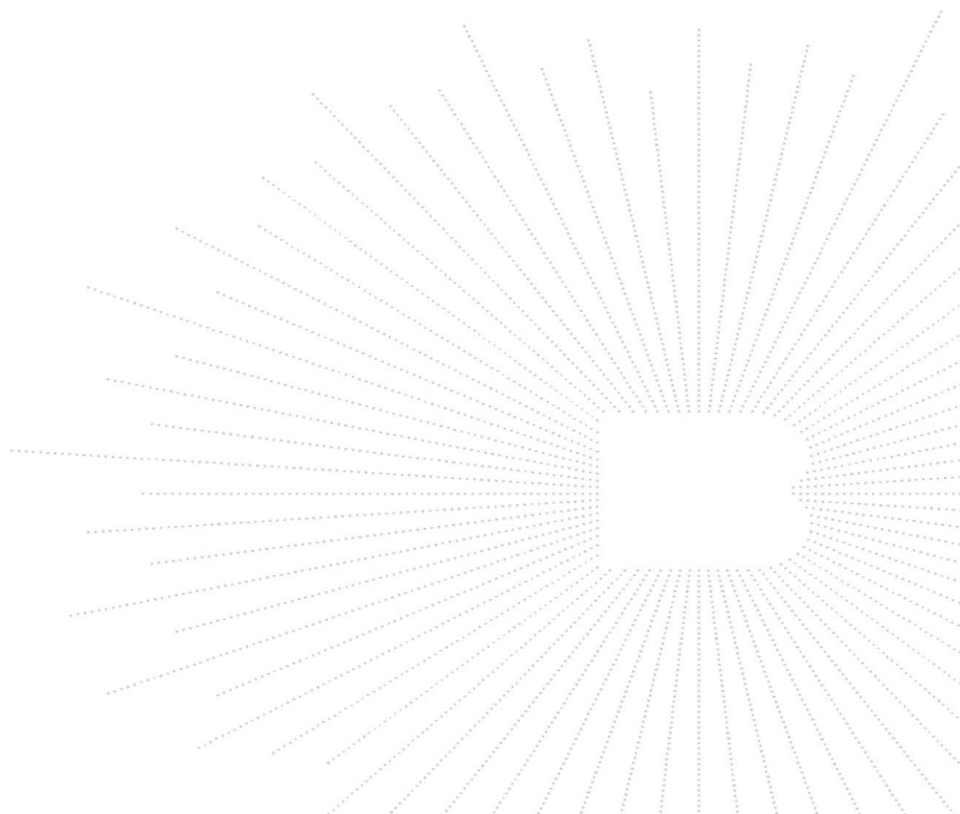

Testing procedure and testing location:**Testing Laboratory** : **Shenzhen BCTC Testing Co., Ltd.**Address : 1-2/F., Building B, Pengzhou Industrial Park, No.158,
Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an
District, Shenzhen, Guangdong, China
-----**Tested by (name, function, signature)...** : Pual Zhong
(Project Handler)**Approved by (name, function, signature).....** : Sam Wang
(Reviewer)

List of Attachments (including a total number of pages in each attachment):

- Attachment I: 2 pages for EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES;
- Attachment II: 6 pages for IEC 62031:2018;
- Attachment III: 6 pages for Photo documentation.

Summary of testing:
Tests performed (name of test and test clause):

- EN IEC 60598-1:2021,
- EN IEC 60598-2-1:2021.

Testing location:
Shenzhen BCTC Testing Co., Ltd.


 1-2/F., Building B, Pengzhou Industrial Park, No.158,
 Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict,
 Bao'an District, Shenzhen, Guangdong, China

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

SYRO-Bricks

Model: LS-B3

 Input: 5V $\overline{=}$ 2A, Max.10W


Importer: XXXXXX

Address: XXXXXX

 Manufacturer: Shenzhen LinkedSparx Technology Co.,
 Ltd

 Address: 606, 82, 4th Industrial Park, Tantou, Songgang,
 Bao'an District, Shenzhen

Made in China

Remark on above marking:

1. The heights of letters and numerals either shown separately or with or as part of symbols aren't less than 2 mm.
2. The heights of WEEE symbol isn't less than 7mm.

Show one for representative, others have same format, different in model name.

Test item particulars :	
Classification of installation and use : Fixed luminaires for indoor use only	
Supply Connection : DC connector	
Possible test case verdicts:	
- test case does not apply to the test object : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing :	
Date of receipt of test item : 2022-09-28	
Date (s) of performance of tests : 2022-09-28 to 2022-10-14	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-13:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as applicant	
General product information and other remarks:	
Product: SYRO-Bricks Rating: 5V $\overline{=}$ 2A, Max.10W, ta: 25°C, IP20, Class III, suitable for direct mounting on normally flammable surfaces. 1. Full tests were performed on model LS-B3. 2. The all models are the same as construction except model name. 3. The main test model LS-B3 consists of up to 30 identical LED modules connected through DC connectors.	

IEC 60598-2-1

Clause	Requirement + Test	Result - Remark	Verdict
1.4 (0)	GENERAL TEST REQUIREMENTS		P
1.4 (0.3)	More sections applicable	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—
1.4 (0.5)	Components	(see Annex 1)	—
1.4 (0.7)	Information for luminaire design in light sources standards		—
1.4 (0.7.2)	Light source safety standard	IEC 62031	—
	Luminaire design in the light source safety standard		P
1.5 (2)	CLASSIFICATION OF LUMINAIRES		P
1.5 (2.2)	Type of protection	Class III	P
1.5 (2.3)	Degree of protection	IP20	—
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
1.5 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
1.6 (3)	MARKING		P
1.6 (3.2)	Mandatory markings	(See marking plate)	P
	Position of the marking	On the enclosure	P
	Format of symbols/text	Symbols: 5,0mm min; Letter: 2,0 mm min.	P
1.6 (3.3)	Additional information	User manual provided	P
	Language of instructions	English	P
1.6 (3.3.1)	Combination luminaires		N/A
1.6 (3.3.2)	Nominal frequency in Hz		N/A
1.6 (3.3.3)	Operating temperature		N/A
1.6 (3.3.5)	Wiring diagram		N/A
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors	25°C	P
1.6 (3.3.11)	Luminaires with remote control		P
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
1.6 (3.3.13)	Specifications of protective shields		N/A
1.6 (3.3.14)	Symbol for nature of supply	Symbol: ---	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non replaceable	P
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
1.6 (3.4)	Test with water	15s with water	P
	Test with hexane	15s with hexane	P
	Legible after test	Yes	P
	Label attached	Label can not be easily removable and show no curling	P

1.7 (4)	CONSTRUCTION		P
1.7 (4.2)	Components replaceable without difficulty		P
1.7 (4.3)	Wireways smooth and free from sharp edges		N/A
1.7 (4.4)	Lamp holders		N/A
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lamp holder has not moved from its position and show no permanent deformation		N/A
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		N/A
1.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
1.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
1.7 (4.7)	Terminals and supply connections		N/A
1.7 (4.7.1)	Contact to metal parts		N/A
1.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		N/A
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
1.7 (4.7.4)	Terminals other than supply connection		N/A
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
1.7 (4.8)	Switches		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
1.7 (4.9)	Insulating lining and sleeves		N/A
1.7 (4.9.1)	Retention		N/A
	Method of fixing.....:		N/A
1.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C).....:		N/A
1.7 (4.10)	Double or reinforced insulation		N/A
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retention of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
1.7 (4.11)	Electrical connections and current-carrying parts		P
1.7 (4.11.1)	Contact pressure		N/A
1.7 (4.11.2)	Screws:		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
1.7 (4.12)	Screws and connections (mechanical) and glands		P
1.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part	Screws for fixed enclosure: 0.5Nm	P
	Torque test: torque (Nm); part		N/A
	Torque test: torque (Nm); part		N/A
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
1.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lamp holder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
1.7 (4.12.5)	Screwed glands; force (Nm)		N/A
1.7 (4.13)	Mechanical strength		P
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)	0.35 Nm	P
	1) live parts		N/A
	2) linings		N/A
	3) protection		N/A
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		P
1.7 (4.13.3)	Straight test finger		P
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
1.7 (4.14)	Suspensions, fixings and means of adjusting		P
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
1.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A
1.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C	See Test Table 1.15 (13.3.2)	P
	- spacing ≥30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
1.7 (4.16)	Luminaires for mounting on normally flammable surfaces		N/A
	No lamp control gear.....:	(compliance with Section 12)	N/A
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
1.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
1.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
1.7 (4.18)	Resistance to corrosion		N/A
1.7 (4.18.1)	- rust-resistance		N/A
1.7 (4.18.2)	- season cracking in copper		N/A
1.7 (4.18.3)	- corrosion of aluminium		N/A
1.7 (4.19)	Igniters compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
1.7 (4.21)	Protective shield		N/A
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....:	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.24)	Photobiological hazards		P
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
1.7 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778		—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2....:		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
1.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
1.7 (4.26)	Short-circuit protection		N/A
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
1.7 (4.27)	Terminal blocks with integrated screwless protective earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
1.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C)		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
1.7 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		N/A
1.7 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	At least one fixing means requiring use of tool		N/A
1.7 (4.31)	Insulation between circuits		N/A
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
1.7 (4.31.1)	SELV or PELV circuits		N/A
	Used SELV/PELV source		N/A
	Voltage ≤ ELV		N/A
	Insulating of SELV/PELV circuits from LV supply		N/A
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
1.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
1.6 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
1.6 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P
1.6 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan ≤ 2 W at rated voltage		N/A
1.6 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A

1.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		N/A
1.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II <input type="checkbox"/> Category III <input type="checkbox"/>	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
1.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	N/A
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with \hat{U}_{OUT} and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A
1.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	N/A
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A

1.9 (7)	PROVISION FOR EARTHING		N/A
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance $< 0,5 \Omega$		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		N/A
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Protective earthing of the luminaire not via built-in control gear		N/A
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		N/A
1.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		N/A
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A
1.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A
	Length of earth conductor		N/A
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

1.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

1.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	N/A

1.11 (5)	EXTERNAL AND INTERNAL WIRING		P
1.11 (5.2)	Supply connection and external wiring		P
1.11 (5.2.1)	Means of connection	DC connector	P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable.....		N/A
	Nominal cross-sectional area (mm ²).....		N/A
	Cables equal to IEC 60227 or IEC 60245		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.3)	Type of attachment, X, Y or Z		N/A
1.11 (5.2.5)	Type Z not connected to screws		N/A
1.11 (5.2.6)	Cable entries:		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A
1.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		N/A
1.11 (5.2.10.3)	Tests:		N/A
	- impossible to push cable; unsafe		N/A
	- pull test: 25 times; pull (N) :		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- torque test: torque (Nm)..... :		N/A
	- displacement \leq 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A
	- function independent of electrical connection		N/A
1.11 (5.2.10.4)	Luminaire with/ designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV \leq 25V RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV \leq 12V RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage \leq 12V RMS/30V DC		N/A
	Pull test of 30N		N/A
1.11 (5.2.11)	External wiring passing into luminaire		N/A
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
1.11 (5.3)	Internal wiring		P
1.11 (5.3.1)	Internal wiring of suitable size and type		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A) :		N/A
	- temperatures..... :	(see Annex 2)	N/A
	Green-yellow for protective earth only		N/A
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²) :	See annex 1	N/A
	Insulation thickness (mm):	See annex 1	N/A
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²):	See annex 1	P
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		P
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
1.11 (5.3.4)	Joints and junctions effectively insulated		N/A
1.11 (5.3.5)	Strain on internal wiring		N/A
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A

1.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
1.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		N/A
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		N/A
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- voltage under load/ no-load AC (V)		N/A
	- voltage under load/ no-load DC (V).....		N/A
	- interrupted DC voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)		N/A
	- voltage under load/ no-load DC (V).....		N/A
	- interrupted DC voltage (V)		N/A
	Class III luminaire only for connection to SELV		N/A
	Class III luminaire not provided with means for protective earthing		N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)		N/A
	- voltage under load/ no-load DC (V).....		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)		N/A
	- voltage under load/ no-load DC (V).....		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.12 (8.2.6)	Covers reliably secured		P
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 μ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A
1.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		—
1.13 (12.2)	Selection of lamps and ballasts		—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied		—
1.13 (12.3)	Endurance test		P
	a) mounting-position	Normal Position	—
	b) test temperature (°C)	35°C	—
	c) total duration (h)	240	—
	d) supply voltage (V)	1.1Un	—
	d) if not equipped with control gear, constant voltage/current (V) or (A)	5.5Vdc	—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
1.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
1.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	N/A
1.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C) :		N/A
	- track-mounted luminaires		N/A
1.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W :		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions :		—
	- Ballast failure at supply voltage (V) :		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—
	- calculated temperature of fixing point/exposed part (°C)..... :		—
	Ball-pressure test :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—
	- calculated temperature of fixing point/exposed part (°C)..... :		—
	Ball-pressure test :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions :		—
	- Components retained in place after the test		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Test with standard test finger after the test		N/A
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link..... : Yes <input type="checkbox"/> No <input type="checkbox"/>		—
	- manual reset cut-out..... : Yes <input type="checkbox"/> No <input type="checkbox"/>		—
	- auto reset cut-out..... : Yes <input type="checkbox"/> No <input type="checkbox"/>		—
	- case of abnormal conditions..... :		—
	- highest measured temperature of fixing point/ exposed part (°C):..... :		—
	Ball-pressure test:..... :	See Test Table 1.15 (13.2.1)	N/A

1.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		N/A
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		N/A
	- classification according to IP..... : IP20		—
	- mounting position during test..... : Cl.9.2.0		—
	- fixing screws tightened; torque (Nm)..... :		—
	- tests according to clauses..... :		—
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	c.1) For luminaires without drain holes – no water entry		N/A
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)	IP20	P
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
1.14 (9.3)	Humidity test 48 h	25°C, 93% R.H.	P


IEC 60598-2-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

1.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ):		P
	SELV/PELV:		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	>100 MΩ	P
	- between current-carrying parts and metal parts of the luminaire.....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV/PELV:		N/A
	- between live parts of different polarity		N/A
	- between live parts and mounting surface		N/A
	- between live parts and metal parts		N/A
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		P
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	500V	P
	- between current-carrying parts and metal parts of the luminaire.....		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV/PELV:		N/A
	- between live parts of different polarity		N/A
	- between live parts and mounting surface		N/A
	- between live parts and metal parts		N/A
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
1.15 (10.3)	Touch current (mA).....		N/A
	Protective conductor current (mA).....		N/A


1.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
1.16 (13.2.1)	Ball-pressure test	See Test Table 1.16 (13.2.1)	P
1.16 (13.3.1)	Needle-flame test (10 s).....	See Test Table 1.16 (13.3.1)	N/A
1.16 (13.3.2)	Glow-wire test (650°C)	See Test Table 1.16 (13.3.2)	P
1.16 (13.4)	Proof tracking test (IEC 60112).....	See Test Table 1.16 (13.4)	N/A

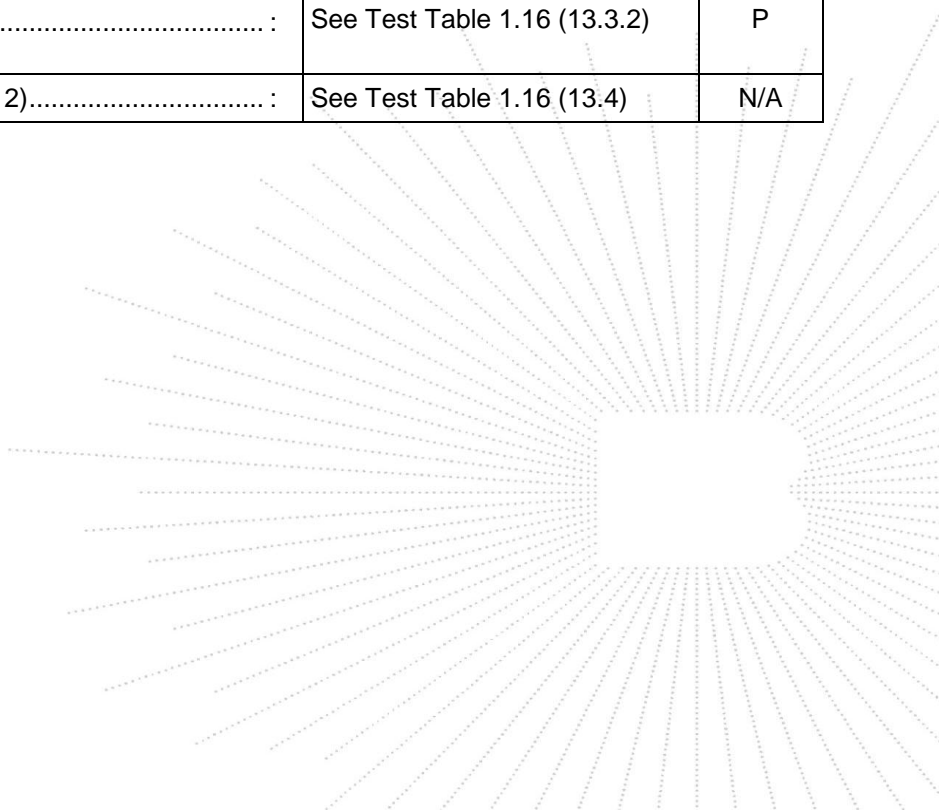

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.8 (11.2)	TABLE I: Creepage distances and clearances						N/A
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						N/A
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						N/A
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V).....:							—
PTI.....:					< 600 <input checked="" type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information: between live parts of different polarity							
Distance 2:							
Working voltage (V).....:							—
PTI.....:					< 600 <input checked="" type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information: between live parts and accessible parts							
Distance 3:							
Working voltage (V).....:							—
PTI.....:					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

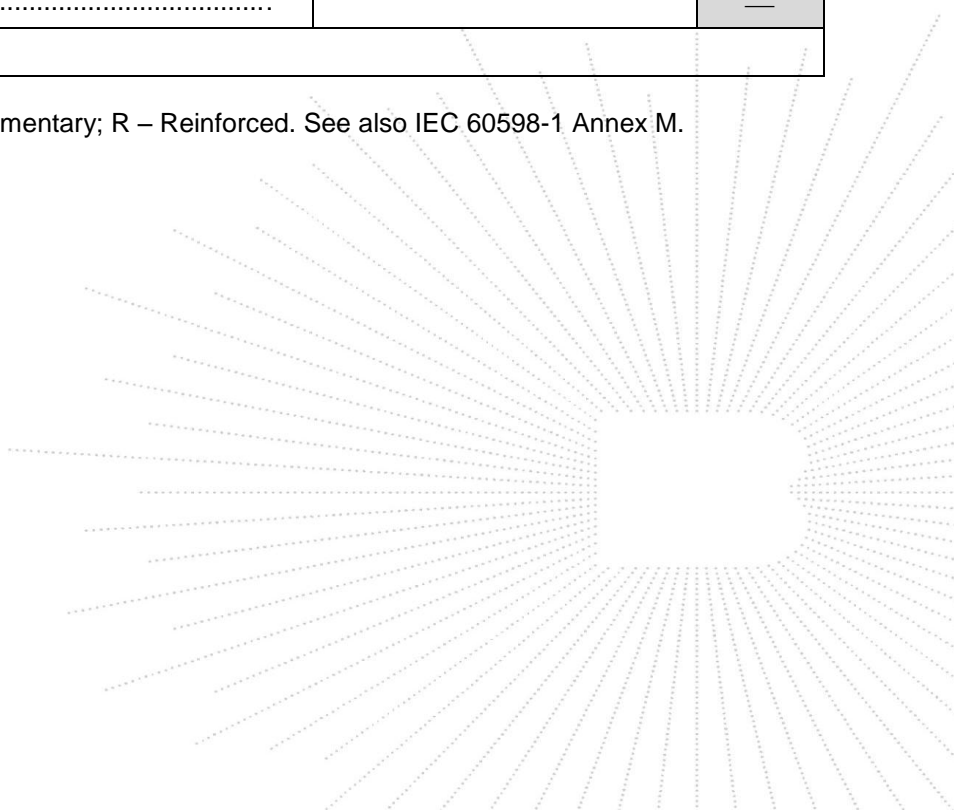

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V).....:							—
Frequency if applicable (kHz).....:							—
PTI.....:					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V).....:							—
Frequency if applicable (kHz).....:							—
PTI.....:					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V).....:							—
Frequency if applicable (kHz).....:							—
PTI.....:					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics		P
Allowed impression diameter (mm)		2	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)
Plastic enclosure	See annex 1	75	0.6
Supplementary information:			

1.16 (13.3.1)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

1.16 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests					P	
Object/ Part No./ Material	Manufacturer/ trademark	Glow wire test (°C)					Verdict
		650		750		850	
		te	ti	te	ti		
Plastic enclosure	See annex 1	0	0	/	/	/	P
Ignition of the specified layer placed underneath the test specimen (Yes/No)						No	
Supplementary information:							

1.16 (13.4)	TABLE: Proof tracking test				N/A
Test voltage PTI		175 V		—	
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:					

ANNEX 1	TABLE: Critical components information			
----------------	---	--	--	--

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Controller PCB	C	Shenzhen Zhongji Technology Co., Ltd	C.40.00XX	130°C	--	Tested with appliance
Controller Plastic Enclosure	C	Shenzhen Zhongji Technology Co., Ltd	0002	PC	--	Tested with appliance
Hexagon Light Plastic Enclosure	C	Shenzhen Junpengda Electronic Co., Ltd	LSB03H0001	PC+PMMA, height: 62.9mm, diameter: 72.5mm, thickness: 24mm	--	Tested with appliance
Hexagon Light PCB	C	Shenzhen Junpengda Electronic Co., Ltd	LSPCB05060 2	48*41.6*1.2mm	--	Tested with appliance
Connect wire	C	GUANGZHOU FUDE ELECTRONIC TECHNOLOGY CO., LTD.	1569	20AWG, 80°C	UL 758	UL

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

ANNEX 2	TABLE: Thermal tests of Section 12	P
	Type reference.....: LS-B3	—
	Lamp used: LED	—
	Lamp control gear used: —	—
	Mounting position of luminaire: As in normal use	—
	Supply wattage (W): —	—
	Supply current (A): —	—
	Temperatures in test 1 - 4 below are corrected for ta (°C): 25°C	—
	- abnormal operating mode.....: —	—

IEC 60598-2-1							
Clause	Requirement + Test	Result - Remark	Verdict				
1.13 (12.4)	- test 1: rated voltage		—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	5.5Vdc	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage		—				
	Through wiring or looping-in wiring loaded by a current of A during the test		—				
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage		—				
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Connect wire	25.0	—	33.5	—	80	—	—
PCB of controller	25.0	—	34.2	—	130	—	—
Plastic enclosure of controller	25.0	—	30.2	—	Ref.	—	—
Plastic enclosure of luminaire	25.0	—	30.9	—	Ref.	—	—
PCB near LED	25.0	—	40.1	—	Ref.	—	—
Mounting surface	25.0	—	28.2	—	90	—	—
Supplementary information:							

ANNEX 3	Screw terminals (part of the luminaire)	N/A
(14)	SCREW TERMINALS	N/A
(14.2)	Type of terminal	—
	Rated current (A)	—
(14.3.2.1)	One or more conductors	N/A
(14.3.2.2)	Special preparation	N/A
(14.3.2.3)	Terminal size	N/A
	Cross-sectional area (mm ²)	—
(14.3.3)	Conductor space (mm)	N/A
(14.4)	Mechanical tests	N/A
(14.4.1)	Minimum distance	N/A
(14.4.2)	Cannot slip out	N/A
(14.4.3)	Special preparation	N/A


IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
(14.4.4)	Nominal diameter of thread (metric ISO thread)..... :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm) :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal		—
	Rated current (A)		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A


(15.6.3.1)	TABLE: Contact resistance test / Heating tests										N/A
(15.6.3.2)	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	

IEC 60598-2-1										
Clause	Requirement + Test								Result - Remark	Verdict
voltage drop (mV)										
	Continued ageing: voltage drop after 50th alt. 100th cycle									N/A
	Max. allowed voltage drop (mV).....:									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
Supplementary information:										

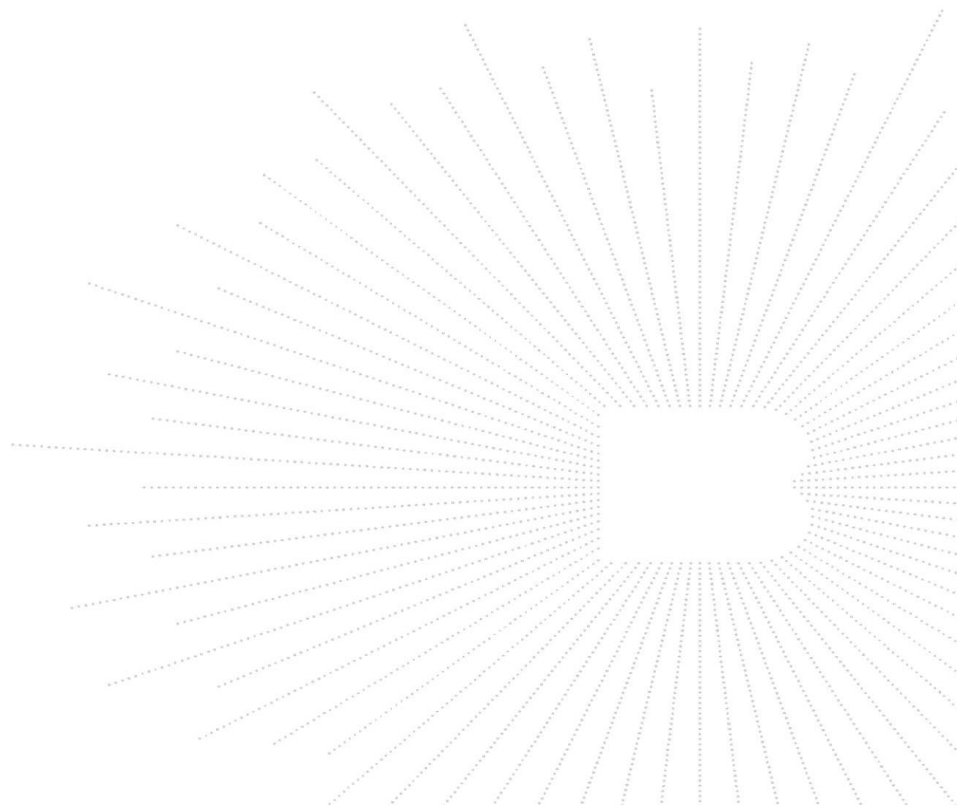

IEC60598_2_1G ATTACHMENT I			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 60598-2-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES LUMINAIRES PART 2: PARTICULAR REQUIREMENTS SECTION 1: FIXED GENERAL PURPOSE LUMINAIRES			
Differences according to : EN IEC 60598-2-1:2021 used in conjunction with EN IEC 60598-1:2021			
TRF template used : IECEE OD-2020-F2:2020, Ed. 1.1			
Attachment Form No. : EU_GD_IEC60598_2_1G			
Attachment Originator : UL(Demko)			
Master Attachment : 2021-10-08			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		—
1.7 (4)	CONSTRUCTION		—
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
1.11 (5)	EXTERNAL AND INTERNAL WIRING		—
1.11 (5.2.2)	Cables equal to EN 50525		N/A
	Replace table 5.1 – Supply cord		N/A
1.13 (12)	ENDURANCE TESTS AND THERMAL TESTS		—
1.13 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		P
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		—
(3.3)	DK: power supply cords of class I luminaires with label		N/A
(4.5.1)	DK: socket-outlets		N/A
(5.2.1)	CY, DK, FI, GB: type of plug		N/A
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		—
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings <i>(Decree of 30 December 2011 on safety regulations for the construction of high-rise buildings and their protection against fire and panic risks; Section VIII; Article GH 48, Lighting)</i> Glow-wire test for outer parts of luminaires:		N/A
	- 850°C for luminaires in stairways and horizontal travel paths		N/A

IEC60598_2_1G ATTACHMENT I			
Clause	Requirement + Test	Result - Remark	Verdict
	- 650°C for indoor luminaires		P
	GB: Requirements according to United Kingdom Building Regulation		N/A

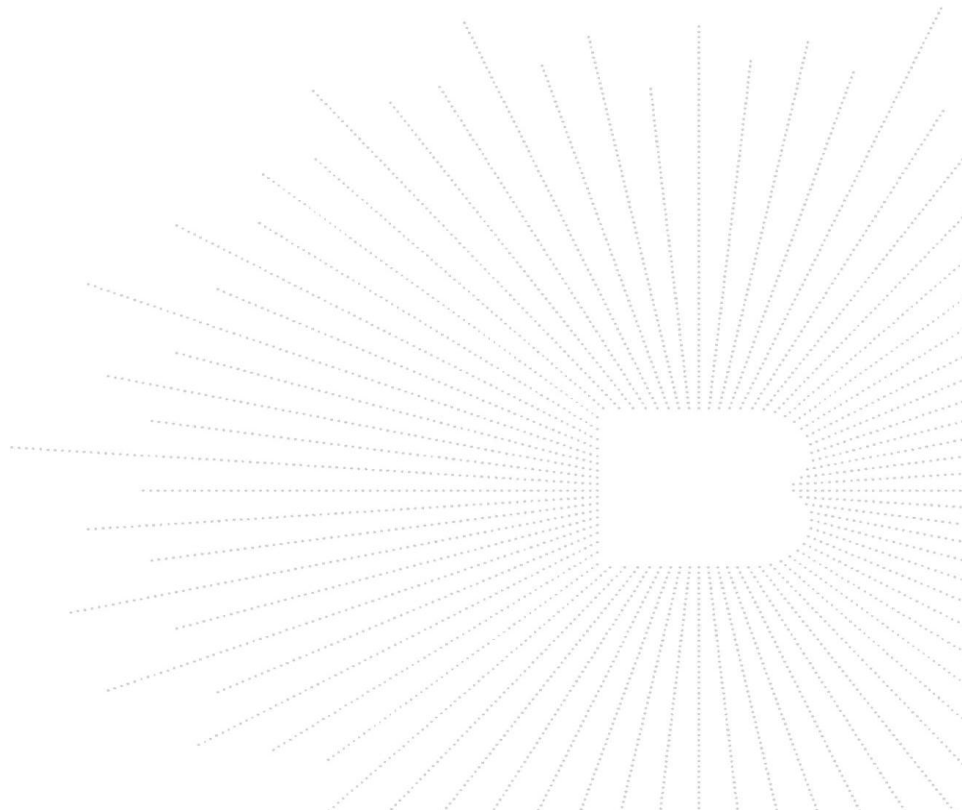

Attachment II

IEC 62031

Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.2	Classification		
	Built-in module : Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Independent module : Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Integral module : Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>		—
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A

6	MARKING		N/A
6.2	Contents of marking for built-in and for independent LED modules		N/A
	a) mark of origin		N/A
	b) model number, type reference		N/A
	c1) constant voltage module; rated supply voltage and supply frequency		N/A
	c2) constant current module; rated supply current and supply frequency		N/A
	d) rated power		N/A
	e) indication of connections, wiring diagram		N/A
	f) value of t_c and place on the module		N/A
	g) E_{thr} if required		N/A
	h) symbol for built-in modules		N/A
	i) heat transfer temperature t_d		N/A
	j) power for heat-conduction P_d		N/A
	k) working voltage for insulation		N/A
6.3	Location of marking for built-in LED modules		N/A
	- marking of a) and b) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.4	Location of marking for independent LED modules		N/A
	- marking of a), b), c) and f) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.5	Marking of integral LED modules		N/A
	- information in 6.2 a) to g) in data sheet, leaflet or website		N/A
6.6	Durable and legibility of marking		N/A
	- marking on the LED module legible after test with water		N/A
	- marking not on the LED module legible		N/A

7	TERMINALS		N/A
7.1	Integral terminals		N/A
	Screw terminals comply with section 14 of IEC 60598-1	(see Annex 3)	N/A
	Screwless terminals comply with section 15 of IEC 60598-1	(see Annex 4)	N/A
7.2	Terminals other than integral terminals		N/A
	Separately approved; component list	(see Annex 2)	N/A

	Ratings suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A

8 (9)	EARTHING		N/A
- (9.1)	Provisions for protective earthing		N/A
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
- (9.2)	Provision for functional earthing		N/A
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A
- (9.3)	Lamp controlgear with conductors for protective earthing by tracks on printed circuit board		N/A
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance (Ω) at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
- (9.4)	Earthing of built-in lamp controlgear		N/A
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	Earthing via independent controlgear		N/A
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm ² and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance (Ω) between earthing terminal and each of the accessible metal parts at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A

9 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		P
- (10.1)	Controlgear protected against accidental contact with live parts		N/A
- (A2)	Voltage measured with 50 k Ω	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c. or protective impedance device	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		N/A

	Adequate mechanical strength on parts providing protection		N/A
- (10.2)	Capacitors > 0,5 μ F: voltage after 1 min (V): < 50 V :		N/A
- (10.3)	Controlgear providing SELV		N/A
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated from earth by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load ≤ 25 V r.m.s. or ≤ 60 V d.c.		N/A
	If output voltage > 25 V r.m.s. or > 60 V d.c.; No load output ≤ 35 V peak or ≤ 60 V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c. :		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A

10 (11)	MOISTURE RESISTANCE AND INSULATION		P
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (M Ω):		P
	For basic insulation ≥ 2 M Ω :	>100 M Ω	P
	For double or reinforced insulation ≥ 4 M Ω :		N/A
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A

11 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		N/A
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		P
	Basic insulation, 2U + 1000 V		P
	Supplementary insulation, 2U + 1000 V		N/A
	Double or reinforced insulation, 4U + 2000 V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

12 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		N/A
	- does not emit flames or molten material		N/A
	- does not produce flammable gases		N/A
	- protection against accidental contact not impaired		N/A
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	N/A
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	N/A
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		N/A
	The insulation resistance $\geq 1 \text{ M}\Omega$		N/A
	No flammable gases		N/A
	No accessible parts have become live		N/A
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		N/A
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		—
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
14 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material		P
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed circuits		P
	Printed circuits used as internal connections complies with clause 14		P
15 (16)	CREEPAGE DISTANCES AND CLEARANCES		N/A
- (16.1)	General		N/A
	Creepage distances and clearances according to 16.2 and 16.3		N/A
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A
- (16.2)	Creepage distances		N/A
- (16.2.2)	Minimum creepage distances for working voltages		N/A
	Creepage distances according to Table 7	(see appended table)	N/A
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A

- (16.3)	Clearances	N/A
- (16.3.2)	Clearances for working voltages	N/A
	Clearances distances according to Table 9	(see appended table) N/A
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies	N/A
	Clearances distances for basic or supplementary insulation according to Table 10	N/A
	Clearances distances for reinforced insulation according to Table 11	N/A


16 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS	P
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)	—
(4.11)	Electrical connections	P
(4.11.1)	Contact pressure	N/A
(4.11.2)	Screws:	N/A
	- self-tapping screws	N/A
	- thread-cutting screws	N/A
(4.11.3)	Screw locking:	N/A
	- spring washer	N/A
	- rivets	N/A
(4.11.4)	Material of current-carrying parts	P
(4.11.5)	No contact to wood or mounting surface	P
(4.11.6)	Electro-mechanical contact systems	N/A
(4.12)	Mechanical connections and glands	N/A
(4.12.1)	Screws not made of soft metal	N/A
	Screws of insulating material	N/A
	Torque test: torque (Nm); part	N/A
	Torque test: torque (Nm); part	N/A
	Torque test: torque (Nm); part	N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal	N/A
(4.12.4)	Locked connections:	N/A
	- fixed arms; torque (Nm)	N/A
	- lampholder; torque (Nm)	N/A
	- push-button switches; torque 0,8 Nm	N/A
(4.12.5)	Screwed glands; force (Nm)	N/A

17 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING	N/A
- (18.1)	Ball-pressure test	See Test Table 17 (18.1) N/A
- (18.2)	Test of printed boards	See Test Table 17 (18.2) N/A
- (18.3)	Glow-wire test (650°C)	See Test Table 17 (18.3) N/A
- (18.4)	Needle-flame test (10 s)	See Test Table 17 (18.4) N/A
- (18.5)	Proof tracking test	See Test Table 17 (18.5) N/A

18	RESISTANCE TO CORROSION	N/A
	Comply with requirements according 4.18 of IEC 60598-1	N/A


20	HEAT MANAGEMENT	N/A
20.1	General	N/A
	Fulfil clause 20 if replaceable LED module and when heat conducting thermal interface is needed.	N/A
20.2	Thermal interface material	N/A
	Thermal interface material delivered with the module if necessary	N/A
20.3	Heat protection	N/A
	Not impair safety when operated under poor heat-conduction conditions according Annex D	N/A

22	PHOTOBIOLOGICAL SAFETY	P
22.1	UV radiation	N/A
	Luminous radiation not exceed 2mW/klm	N/A
22.2	Blue light hazard	P
	Assessed according to IEC TR 62778	P
22.3	Infrared radiation	N/A
	Requirements for infrared radiation when required	N/A
A	ANNEX A - TESTS	P
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable	P

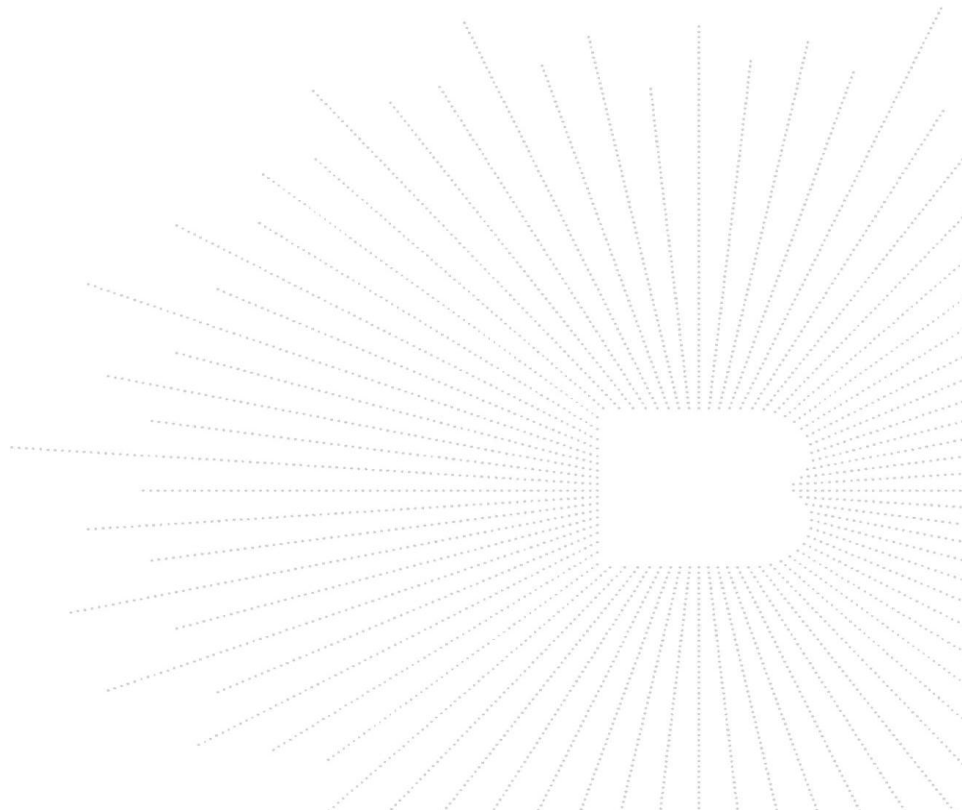


Attachment III
Photo documentation


EUT Photo 1

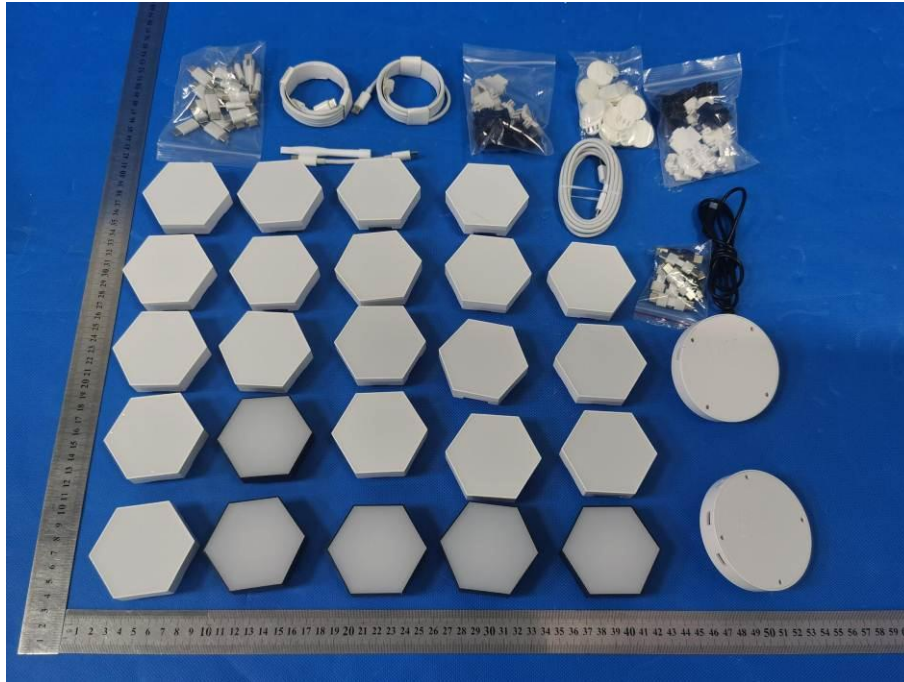


EUT Photo 2

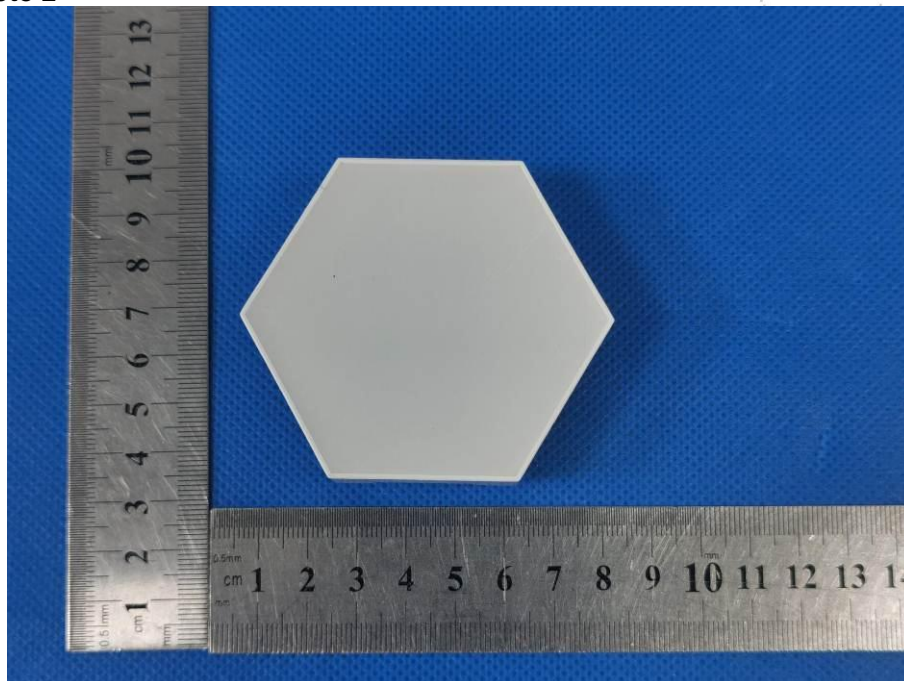

EUT Photo 3

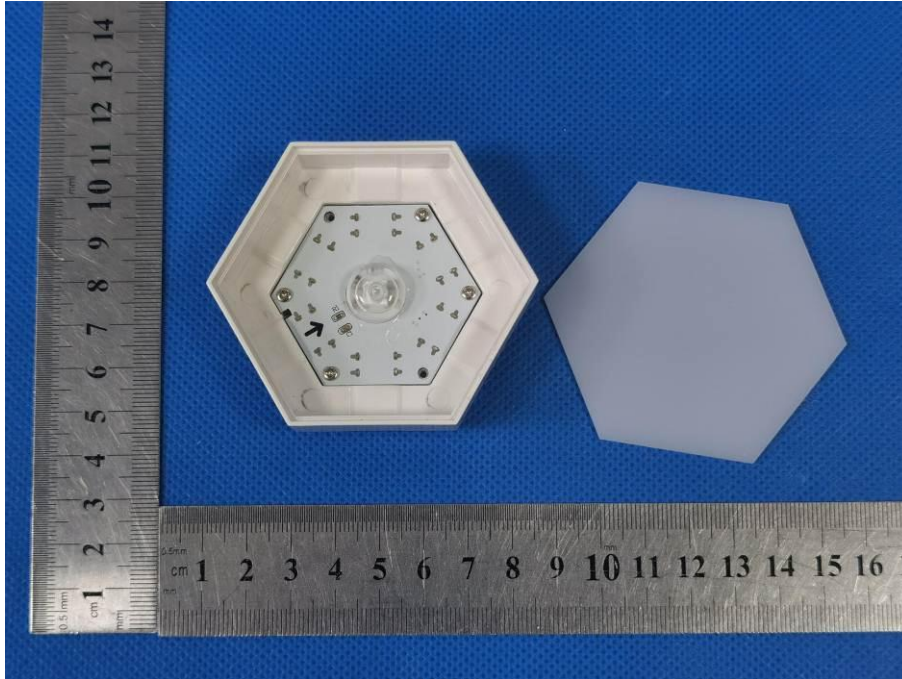


EUT Photo 4

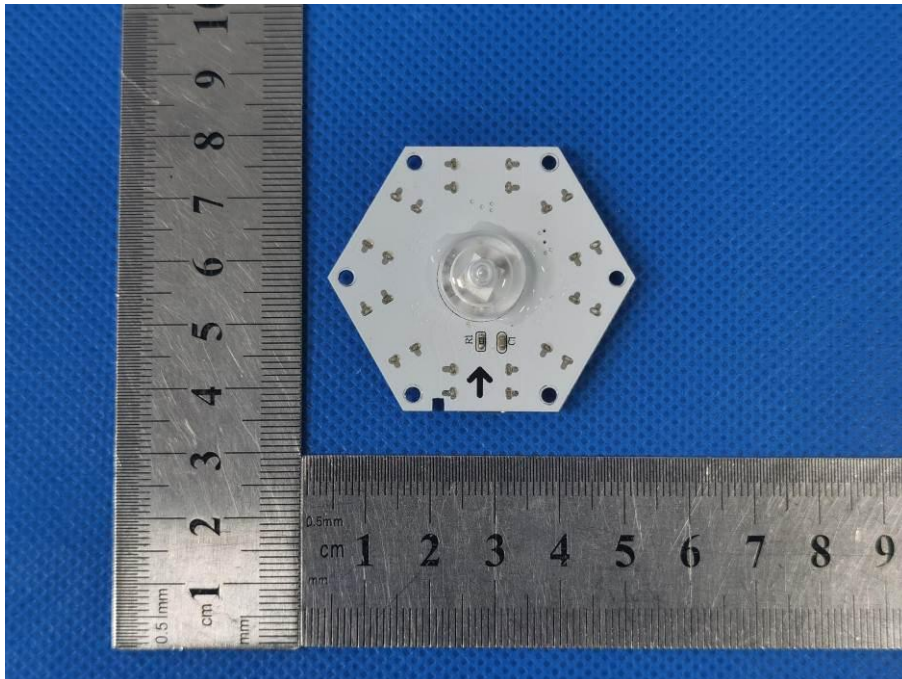


EUT Photo 5




EUT Photo 6

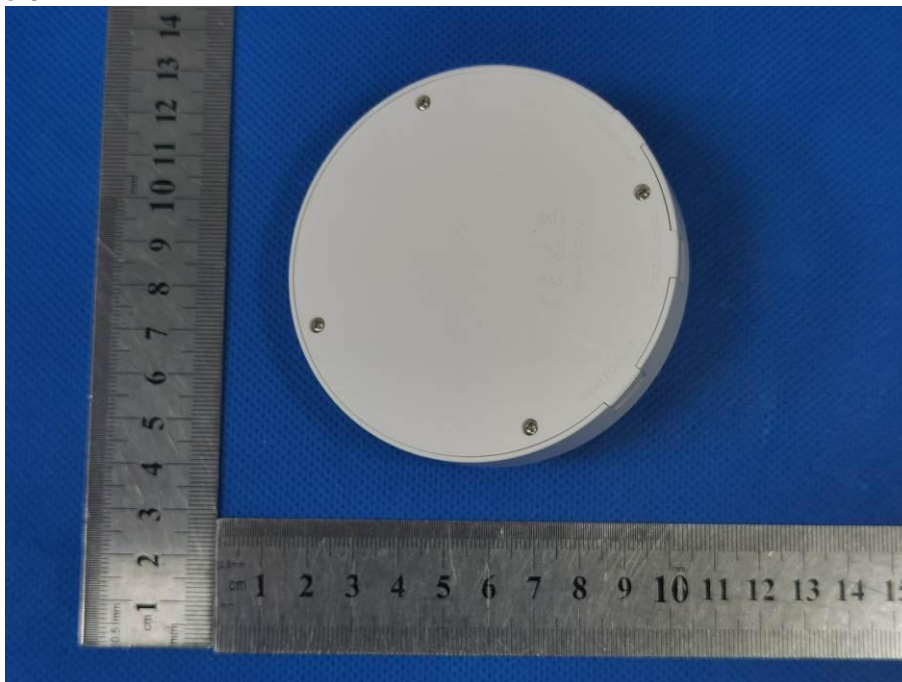


EUT Photo 7

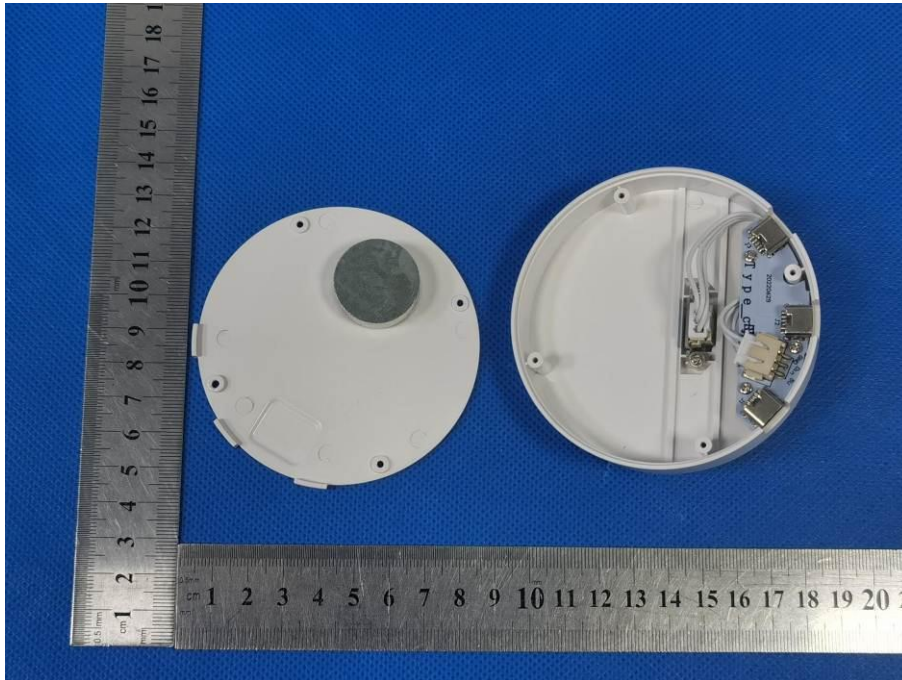

EUT Photo 8

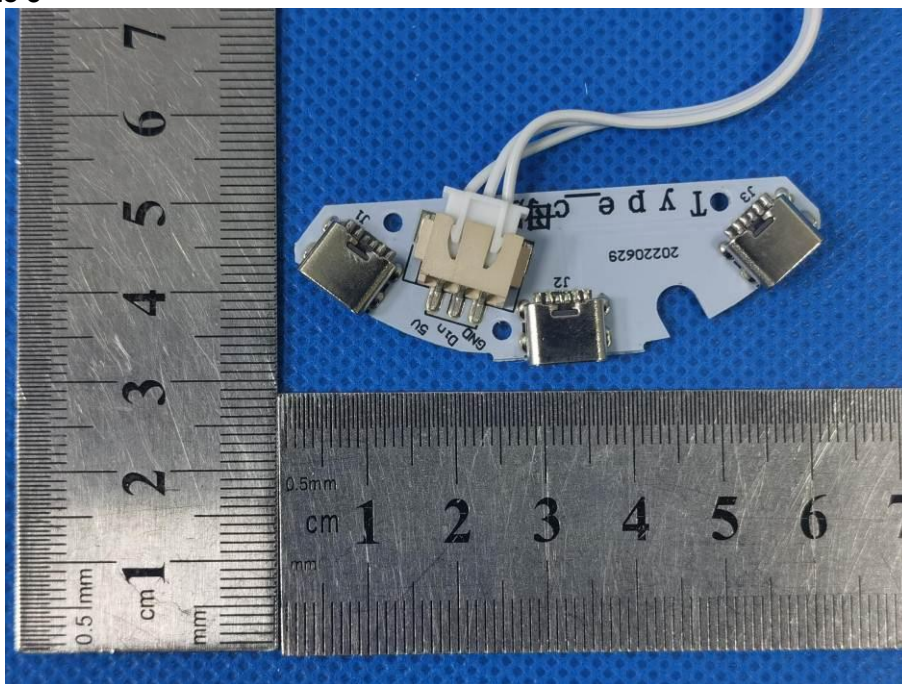


EUT Photo 9

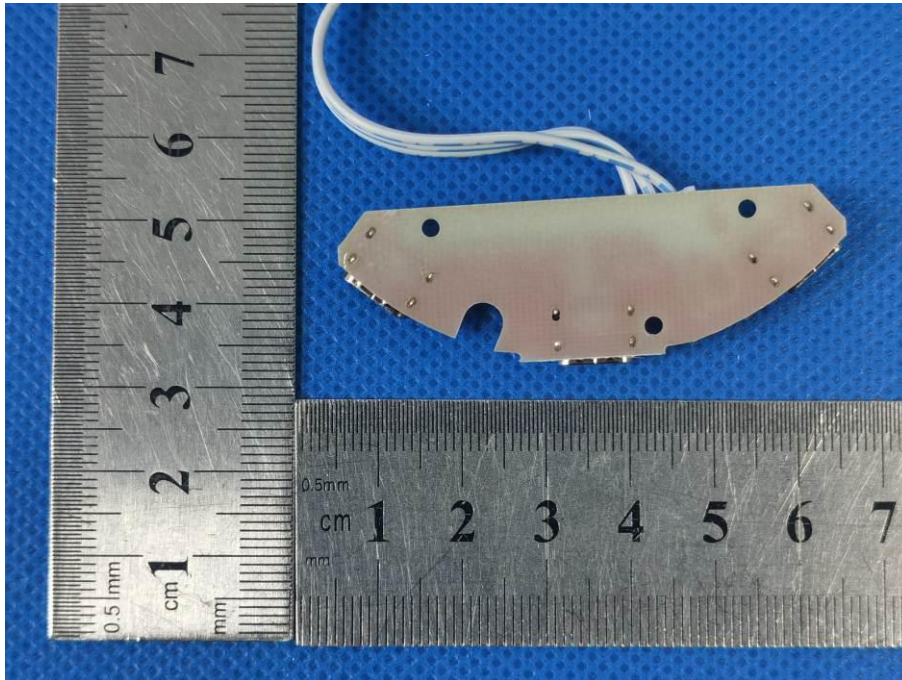


EUT Photo 10



EUT Photo 11

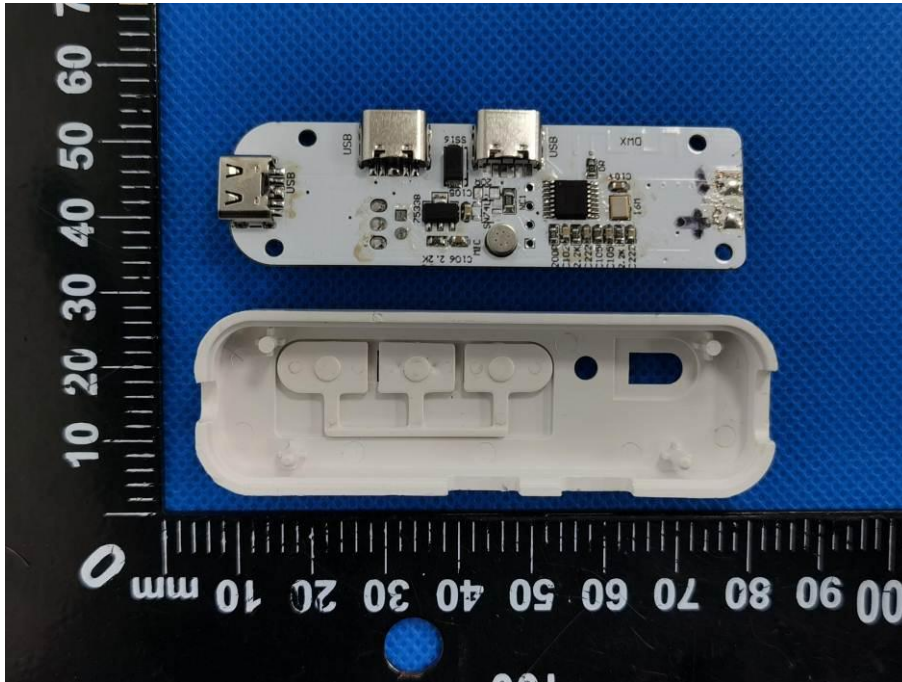

EUT Photo 12

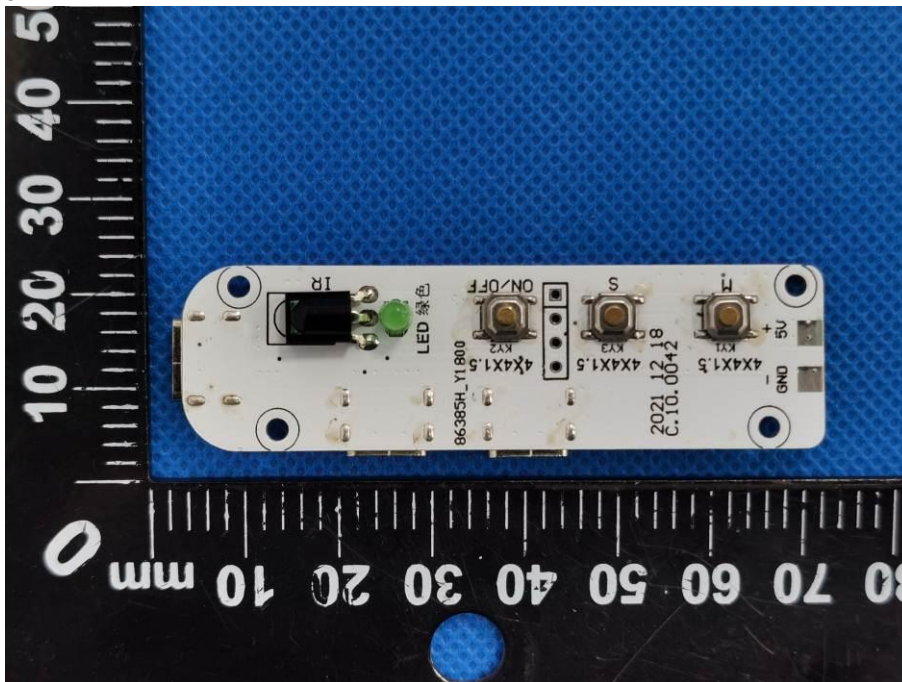

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
TEL : 400-788-9558

P. C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****